

BELVEDERE
PENDANT

12" DIA SQ
23" FRAME HT



DESIGNED BY BARBARA BARRY, THE BELVEDERE SERIES IS A NEW WAY OF LOOKING AT THE LANTERN,
LONG A SYMBOL OF ESTABLISHING A PLACE OF IMPORTANCE. OFFERED IN TWO SIZES WITH MULTIPLE
FINISH, GLASS AND LAMPING OPTIONS. SCUNCES ALSO AVAILABLE. SHOWN IN BLACKENED BRASS.

BOYD
EXTERIOR

E10308

Product Number / Name

Product Information

1 Lamping, Lamp Type

Other 2 Requirements

3 Finish

EIO308 Belvedere I Lantern


| Height Specify | Diameter | Frame Height | Net Wt. |
|----------------|----------------------|---------------|---------|
| 23" | 12" square 305 mm | 23" 584 mm | 45 lbs |

Canopy: 6 1/4" square x 1 1/8"; 159 x 29 mm

Other Information:

UL listed for wet locations
Diffusers: frosted or clear ribbed glass
Bottom diffuser: wire mesh inset in brass frame
Fixture has four stems

Fixture must be properly supported due to weight.

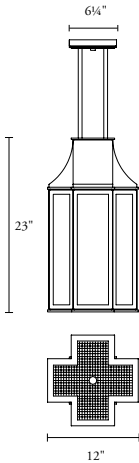

- Incandescent
Medium base
Four, T-10, 60w max each

Fluorescent

- One, CFQ26W/GX24q-3
- One, CFTR26W/GX24q *or*
- One, CFTR32W/GX24q *or*
- One, CFTR42W/GX24q

Upcharges will apply for fluorescent dimming. Please contact your local Boyd rep with the specification of the dimming control system being used.

- Height Overall:
- 30" 762 mm
 - 36" 914 mm
 - 42" 1067 mm
 - 48" 1219 mm

- Glass diffusers:
- Frosted ribbed
 - Clear ribbed

- FLO Voltage:
- 120
 - 277

- Antiqued Boyd Brass (AB/B)
- Blackened Brass (BK/BS)
- Satin Brass (S/B)
- Satin Nickel (S/N)

EIO309 Belvedere II Lantern


| Height Specify | Diameter | Frame Height | Net Wt. |
|----------------|----------------------|---------------|---------|
| 27" | 16" square 406 mm | 27" 659 mm | 54 lbs |

Canopy: 8 1/4" square x 1 1/8"; 210 x 29 mm

Other Information:

UL listed for wet locations
Diffusers: frosted or clear ribbed glass
Bottom diffuser: wire mesh inset in brass frame
Fixture has four stems

Fixture must be properly supported due to weight.

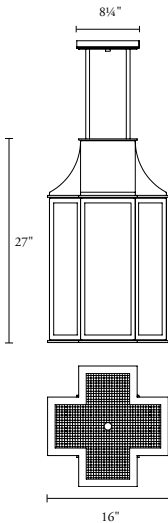

- Incandescent
Medium base
Four, T-10, 60w max each

Fluorescent

- One, CFQ26W/GX24q-3
- One, CFTR26W/GX24q *or*
- One, CFTR32W/GX24q *or*
- One, CFTR42W/GX24q

Upcharges will apply for fluorescent dimming. Please contact your local Boyd rep with the specification of the dimming control system being used.

- Height Overall:
- 36" 914 mm
 - 42" 1067 mm
 - 48" 1219 mm
 - 54" 1372 mm

- Glass diffusers:
- Frosted ribbed
 - Clear ribbed

- FLO Voltage:
- 120
 - 277

- Antiqued Boyd Brass (AB/B)
- Blackened Brass (BK/BS)
- Satin Brass (S/B)
- Satin Nickel (S/N)


EIO302 Belvedere I Sconce

| Height | Width | Projection | Net Wt. |
|--------|--------|------------|---------|
| 14" | 9" | 6 1/2" | 16 lbs |
| 356 mm | 229 mm | 165 mm | |

Center of outlet box to top of fixture: 7"; 178 mm
For ADA compliance, height of center of outlet box above finished floor: 87"; 2210 mm

Other Information:

UL listed for wet locations
Diffusers: frosted or clear ribbed glass
Bottom diffuser: wire mesh inset in brass frame



- Incandescent
Medium base
One, A-19, 60w max

- Fluorescent
One, CFTR26W/GX24q

Fluorescent dimming for this fixture requires a remote ballast location. Upcharges will apply. Please contact your local Boyd rep with the specification of the dimming control system being used.

- Glass diffusers:
- Frosted ribbed
 - Clear ribbed

- FLO Voltage:
- 120
 - 277

- Antiqued Boyd Brass (AB/B)
- Blackened Brass (BK/BS)
- Satin Brass (S/B)
- Satin Nickel (S/N)


EIO303 Belvedere II Sconce

| Height | Width | Projection | Net Wt. |
|---------|--------|------------|---------|
| 19 3/4" | 12" | 7 1/4" | 21 lbs |
| 502 mm | 305 mm | 184 mm | |

Center of outlet box to top of fixture: 9 7/8"; 251 mm
For ADA compliance, height of center of outlet box above finished floor: 89 7/8"; 2283 mm

Other Information:

UL listed for wet locations
Diffusers: frosted or clear ribbed glass
Bottom diffuser: wire mesh inset in brass frame

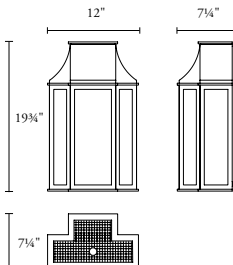

- Incandescent
Medium base
One, A-21, 100w max

Fluorescent

- One, CFTR26W/GX24q *or*
- One, CFTR32W/GX24q *or*
- One, CFTR42W/GX24q

Upcharges will apply for fluorescent dimming. Please contact your local Boyd rep with the specification of the dimming control system being used.

- Glass diffusers:
- Frosted ribbed
 - Clear ribbed

- FLO Voltage:
- 120
 - 277

- Antiqued Boyd Brass (AB/B)
- Blackened Brass (BK/BS)
- Satin Brass (S/B)
- Satin Nickel (S/N)